



Perforated Air Grille Panel

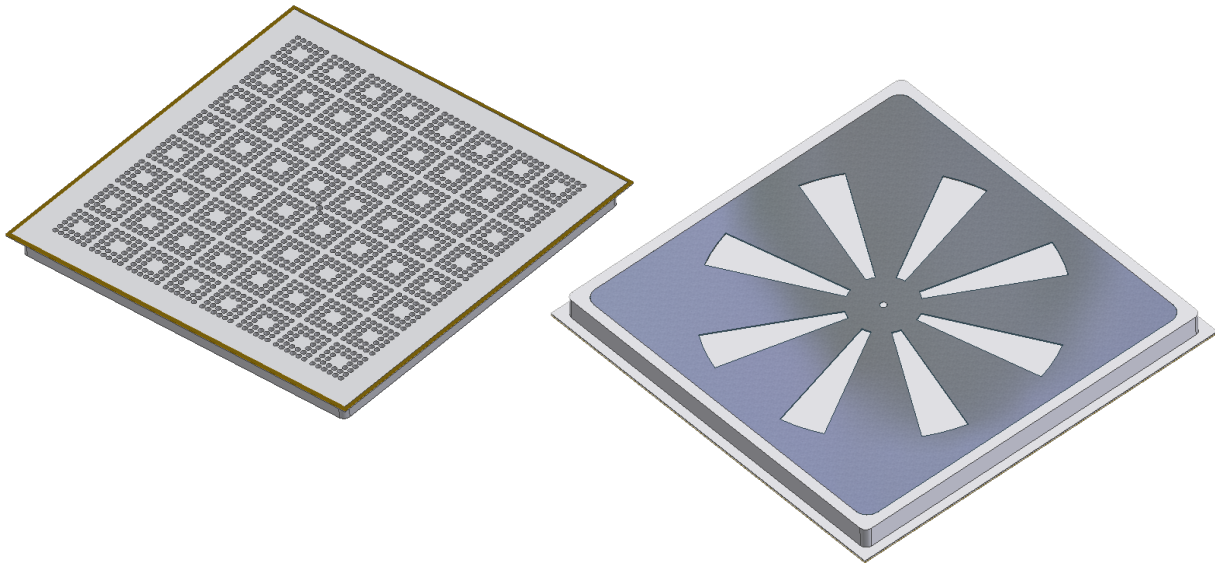

General Information Perforated Panel 25%

1. The standard size is 600mm long
2. This perforated panel is a hollow steel panel with an inbuilt damper to help distribute and control the air flow in Data/Control Room applications.
3. The perforated panel has a 25% open area.
4. The perforated panel damper is adjusted using an Allen key which turns the damper fins.

The Perforated Panel is supported by:

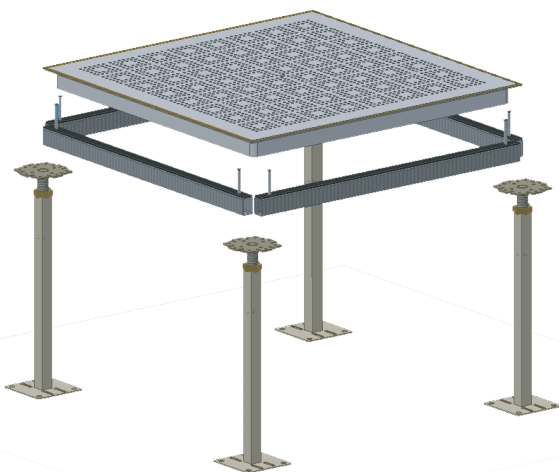

Pressure Pa	Air Volume	
	Without Damper	With Damper
2.5	108	91
5	164	132
7.5	202	164
10	232	193
12.5	261	215
15	289	238
17.5	308	255
20	329	274
22.5	353	291
25	370	308