
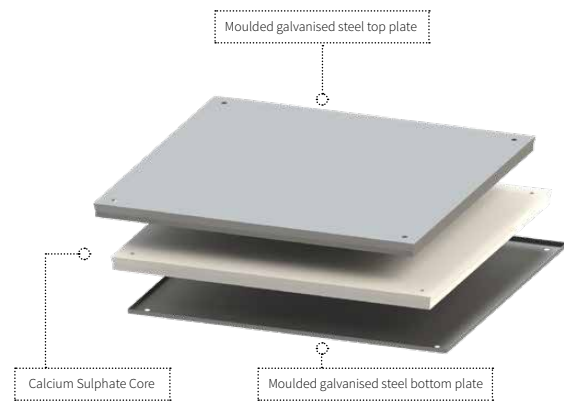


# URBAN SERIES URBAN RIGID

## RECOMMENDED APPLICATIONS

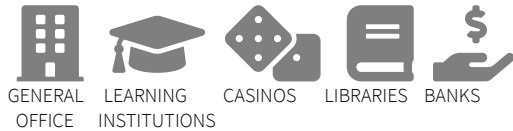

## SYSTEM NAME

Urban Rigid Extra Heavy Grade 6.0kN

## DESCRIPTION

The Urban Rigid System is an alternate system to Icon Data for commercial environments. It is widely used for finished floor heights over 800mm or areas that require a more rigid installation due to high load or traffic.

## COMPLIANT STANDARDS

Australian Standard AS4154/AS4155  
Australian Standard AS1170  
NATA Testing Certification  
ISO9239-1-2003  
EN12825-2001  
DIN4102-1-1998

**SIZE** 600mm x 600mm

**CORE** Calcium Sulphate

**FINISH** Galvanized steel

## CONSTRUCTION

The panels consist of a hardened galvanized steel top and bottom sheet plate encapsulating a structural calcium sulphate core.

## TOLERANCE

±0.25mm and a flatness tolerance of ±0.5mm measured on a diagonal across the top of the panel


## CONNECTION

The panel is screw fixed on top of the stringer assembly to the pedestal head at all four corners

**DEPTH** 30mm

## PERFORMANCE TO STANDARDS GUIDE PER AS4154 – 1993 AUSTRALIAN STANDARD – GENERAL ACCESS FLOORS

Load Level	Panel (kg)	System (kg/m <sup>2</sup> at 450mm FFH)
6.0kN Extra Heavy Grade	20.6	63.7
<b>STATIC PERFORMANCE (kN)</b>		
<b>Concentrated</b>	<b>Impact</b>	<b>Ultimate</b>
6.0	0.4	18.0
<b>DYNAMIC PERFORMANCE (kN) - Passes</b>		
<b>10 passes (wheel size 75x25mm)</b>	<b>10,000 passes (wheel size 150x50mm)</b>	<b>40,000 passes (wheel size 200x75mm)</b>
5.5	4.4	2.25
<b>Safety Factor:</b> Panels must provide a minimum safety factor of three (3) times the concentrated load specified above in accordance with Australian Standards AS4154-1993		

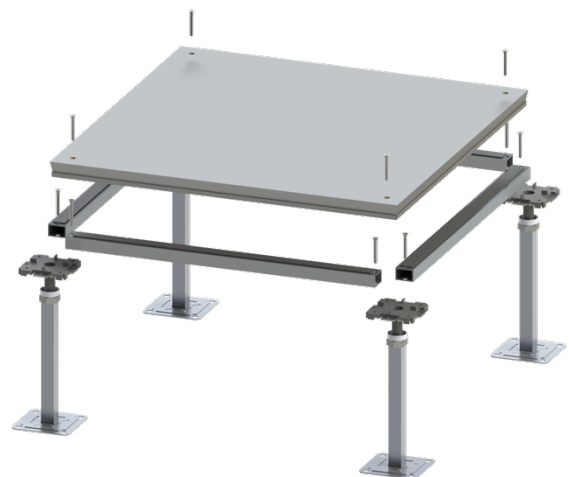

## PEDESTAL SIZE

100mm x 100mm base plate

## PEDESTAL CONSTRUCTION

Hot dipped galvanised steel pedestal base, head and rod. Finished with an ABS locating gasket.

## PEDESTAL LOCKING

The pedestals will be provided with an adjusting and locking nut to maintain the assembly at a selected height, which requires a deliberate action to change the height setting, and which prevents vibration displacement.

## PEDESTAL FINISH

Hot dipped galvanized finish.

## PEDESTAL CONNECTION

The panel is screw fixed to the pedestal head at all four corners.

## PEDESTAL FINISHED FLOOR HEIGHT (FFH)

The finished floor height of the access floor is measured from the sub floor to the top surface of the installed access floor.

## STRINGER SIZE

31mm x 21mm x 1.2mm x 600mm

## STRINGER CONSTRUCTION

Rectangular steel welded tube with 1.6mm sponge rubber foam.

## STRINGER FINISH

Hot dipped galvanized finish.

## STRINGER CONNECTION

The stringer is screw fixed to the pedestal head.