Introducing the ASP Origin Panel




ABOUT THE SERIES

The **Origin Series** was the first access floor system developed in history. The system, with its wood core, has evolved over time to now be a robust panel which allows a functional and efficient a cess floor solution.

ORIGIN PANEL

This steel wrapped **Origin Panel** is a composition panel with a composition particleboard core. The core is wrapped with galvanized steel, creating a strong durable panel suitable for commercial environments.

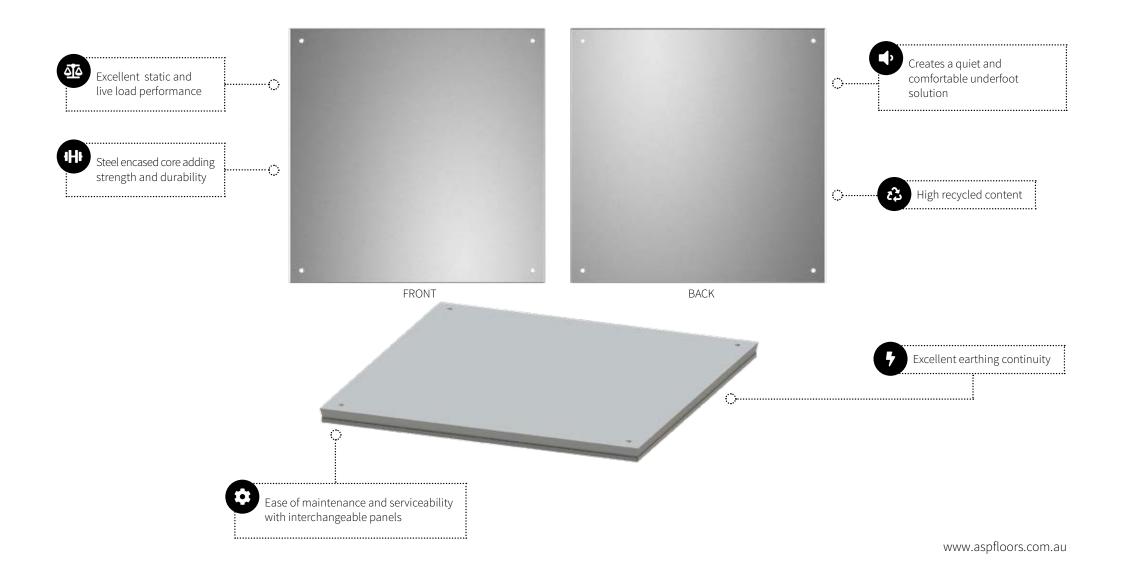

THE PANEL CONSTRUCTION

SIZE 600mm x 600mm

DEPTH

Medium Grade 30.6mm Heavy 30.8mm Extra Heavy Grade 31.2mm

CONSTRUCTION

The panel is constructed from a lower sheet of die formed steel with corrosion resistant protection, inside and out, encapsulating a composition wood core. A top sheet of steel is then positioned and the edges are folded and pressed to overlap the lower case

CORE High Density Particleboard

TOLERANCE


 ± 0.25 mm and a flatness tolerance of ± 0.5 mm measured on a diagonal across the top of the panel


FINISH

Galvanised Steel

CONNECTION

The panel is screw fixed to the pedestal head at all four corners be screw fixed to the pedestal head at all four corners

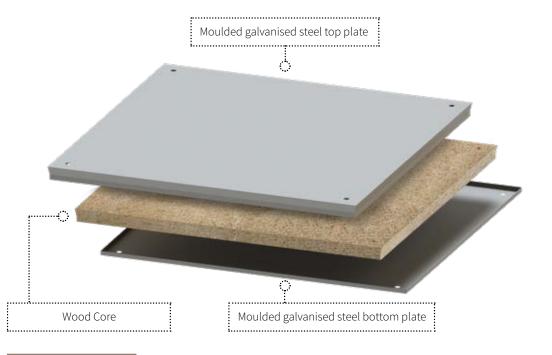

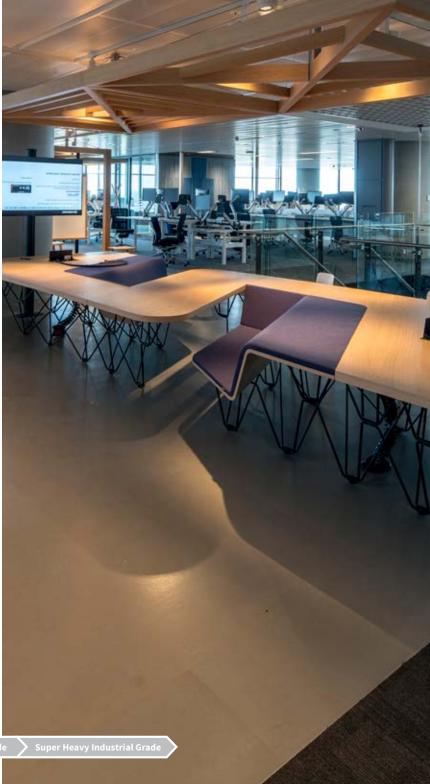

LOAD TOLERANCES

Medium Grade

Heavy Grade

Extra Heavy Grade

Industrial Grade

leavy Industrial Grade

Origin Rigid



ABOUT THE SYSTEM

The **Origin Rigid System** utilizes stringers to create a robust rigid grid under structure. This system allows the use of access flooring in environments that have requirements for higher underfloor void spaces over 800mm or heavier live loads.

APPLICATIONS

- Defence Projects
- Courtrooms
- Tiered seating environments
- Projects with higher void areas than 800mm high

